


学生番号 _____ 氏 名 _____

演習問題：モーメント，数力の合力


1. O 点回りのモーメント力を求めよ.

(1)

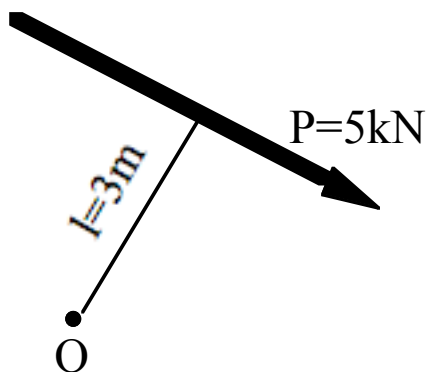


$$M = P \cdot l = 5kN \times 3m = 15kN \cdot m$$

(2)

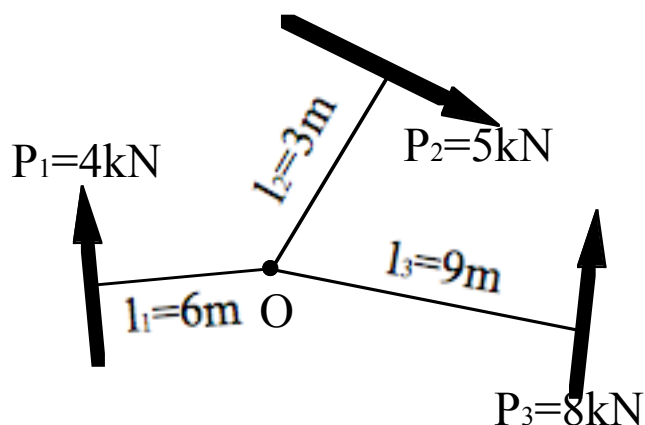

$$\begin{aligned} M &= P_1 \cdot l_1 + P_2 \cdot l_2 - P_3 \cdot l_3 \\ &= 4kN \times 6m + 5kN \times 3m - 8kN \times 9m \\ &= -33kN \cdot m \end{aligned}$$


(3)

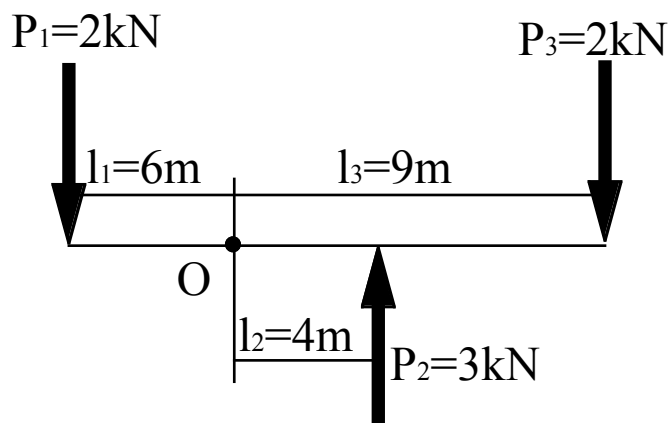

$$\begin{aligned} M &= -P_1 \cdot l_1 - P_2 \cdot l_2 + P_3 \cdot l_3 \\ &= -2kN \times 6m - 3kN \times 4m + 2kN \times 9m \\ &= -6kN \cdot m \end{aligned}$$

2. 合力 R とその作用位置を求め、図示せよ.

(1)

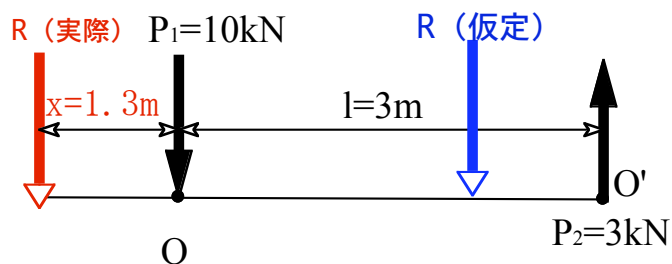


$$R = -P_1 + P_2 = -10\text{kN} + 3\text{kN} = -7\text{kN} \text{ (下向き)}$$

$$M_o = -P_2 \cdot l = 7\text{kN} \cdot x$$

$$x = \frac{-P_2 \cdot l}{7\text{kN}} = \frac{-3\text{kN} \cdot 3\text{m}}{7\text{kN}} = -1.3\text{m}$$

(2)

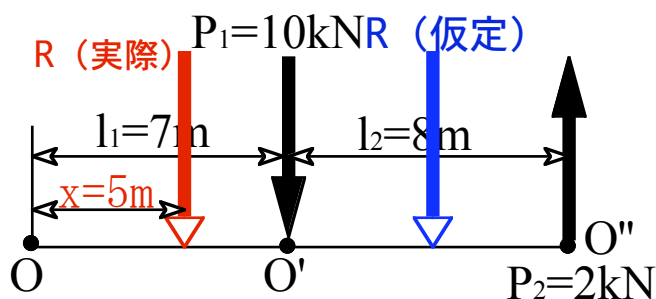


$$R = -P_1 + P_2 = -10\text{kN} + 2\text{kN} = -8\text{kN} \text{ (下向き)}$$

$$M_o = P_1 \cdot l_1 - P_2 \cdot (l_1 + l_2) = 8\text{kN} \cdot x$$

$$x = \frac{P_1 \cdot l_1 - P_2 \cdot (l_1 + l_2)}{8\text{kN}} = \frac{10 \cdot 7 - 2 \cdot (7 + 8)}{8} = 5\text{m}$$

(3)

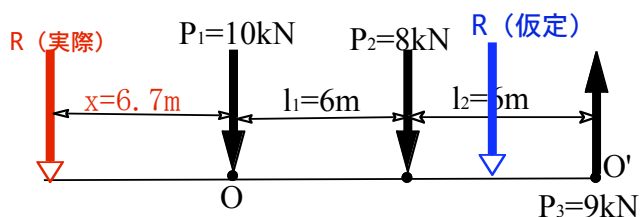


$$R = -P_1 - P_2 + P_3 = -9\text{kN} \text{ (下向き)}$$

$$M_o = P_2 \cdot l_1 - P_3 \cdot (l_1 + l_2) = 9\text{kN} \cdot x$$

$$x = \frac{P_2 \cdot l_1 - P_3 \cdot (l_1 + l_2)}{9\text{kN}} = \frac{8 \cdot 6 - 9 \cdot (6 + 6)}{9} = -6.7\text{m}$$

3. 1 点に作用していない数力の合力 $\mathbf{R}$ とその作用位置を求め、図示せよ.

(1)

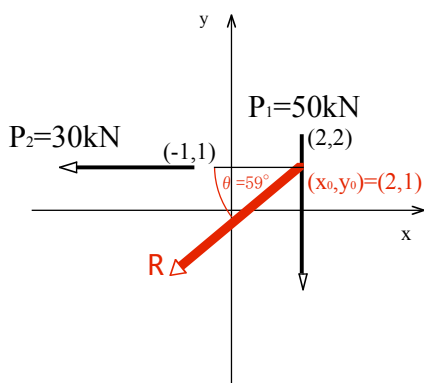

	$\rightarrow H$	$\uparrow V$	$H \cdot y$	$V \cdot x$
P_1	0kN	-50kN	$0 \times 2m = 0$	$50kN \times 2m = 100kN \cdot m$
P_2	-30kN	0kN	$-30kN \times 1m = -30kN \cdot m$	$0 \times 1m = 0$
Σ	-30kN	-50kN	-30kN·m	100kN·m

$$R = \sqrt{(\Sigma H)^2 + (\Sigma V)^2} = \sqrt{(-30)^2 + (-50)^2} = 58.3kN$$

$$\theta = \tan^{-1}\left(\frac{\Sigma V}{\Sigma H}\right) = \tan^{-1}\left(\frac{50}{-30}\right) = -59^\circ$$

$$-|\Sigma H| \cdot y_0 = \Sigma(H \cdot y)$$

$$-30 \times y_0 = -30$$


$$y_0 = 1m$$

$$|\Sigma V| \cdot x_0 = \Sigma(V \cdot x)$$

$$50 \times x_0 = 100$$

$$x_0 = 2m$$

(2)

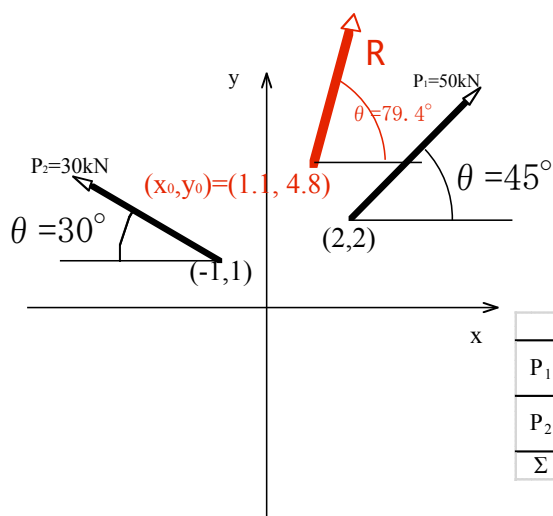

	$\rightarrow H$	$\uparrow V$	$H \cdot y$	$V \cdot x$
P_1	$P_1 \cos 45^\circ = 35.4kN$	$P_1 \sin 45^\circ = 35.4kN$	$35.4kN \times 2m = 70.8kN \cdot m$	$-35.4kN \times 2m = -70.8kN \cdot m$
P_2	$-P_2 \cos 30^\circ = -26kN$	$P_2 \sin 30^\circ = 15kN$	$-26kN \times 1m = -26kN \cdot m$	$15kN \times 1m = 15kN \cdot m$
Σ	9.4kN	50.4kN	44.8kN·m	55.8kN·m

$$R = \sqrt{(\Sigma H)^2 + (\Sigma V)^2} = \sqrt{(9.4)^2 + (50.4)^2} = 51.3kN$$

$$\theta = \tan^{-1}\left(\frac{\Sigma V}{\Sigma H}\right) = \tan^{-1}\left(\frac{50.4}{9.4}\right) = 79.4^\circ$$

$$|\Sigma H| \cdot y_0 = \Sigma(H \cdot y)$$

$$9.4 \times y_0 = 44.8$$

$$y_0 = 4.8m$$


$$-|\Sigma V| \cdot x_0 = \Sigma(V \cdot x)$$

$$-50.4 \times x_0 = -55.8$$

$$x_0 = 1.1m$$

4. 部材力 T_1 , T_2 を求めよ.

(1)

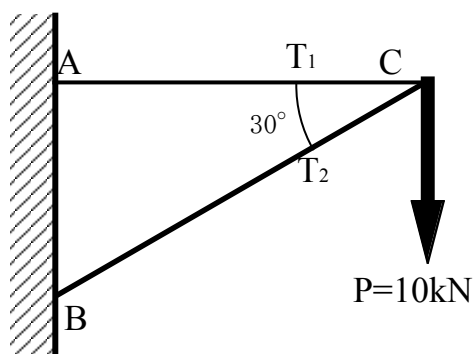

鉛直方向と水平方向の釣り合いより

$$\Sigma V = -T_2 \sin 30^\circ - P = 0$$

$$T_2 = -\frac{P}{\sin 30^\circ} = -\frac{10 \text{ kN}}{\sin 30^\circ} = -20 \text{ kN}$$

$$\Sigma H = -T_1 - T_2 \cos 30^\circ = 0$$

$$T_1 = -T_2 \cos 30^\circ = -(-20 \text{ kN}) \times \cos 30^\circ = 17.3 \text{ kN}$$

モーメントの釣り合いより


$$\Sigma M_A = P \times \ell_{AC} + T_2 \cdot \ell_{AC} \sin 30^\circ = 0$$

$$T_2 = -\frac{P}{\sin 30^\circ} = -\frac{10 \text{ kN}}{\sin 30^\circ} = -20 \text{ kN}$$

$$\Sigma M_B = P \cdot \ell_{BC} \cos 30^\circ - T_1 \cdot \ell_{BC} \sin 30^\circ = 0$$

$$T_1 = \frac{P \cdot \cos 30^\circ}{\sin 30^\circ} = \frac{10 \text{ kN} \cdot \cos 30^\circ}{\sin 30^\circ} = 17.3 \text{ kN}$$

(2)

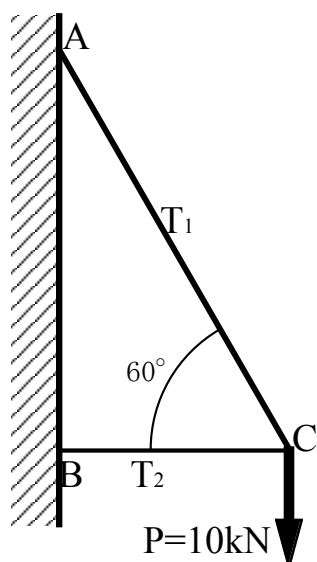

鉛直方向と水平方向の釣り合いより

$$\Sigma V = T_1 \sin 60^\circ - P = 0$$

$$T_1 = \frac{P}{\sin 60^\circ} = \frac{10 \text{ kN}}{\sin 60^\circ} = 11.5 \text{ kN}$$

$$\Sigma H = -T_1 \cos 60^\circ - T_2 = 0$$

$$T_2 = -T_1 \cos 60^\circ = -(11.5 \text{ kN}) \times \cos 60^\circ = -5.8 \text{ kN}$$

モーメントの釣り合いより


$$\Sigma M_A = P \times \ell_{AC} \cos 60^\circ + T_2 \cdot \ell_{AC} \sin 60^\circ = 0$$

$$T_2 = -\frac{P \cdot \cos 60^\circ}{\sin 60^\circ} = -\frac{10 \text{ kN} \cdot \cos 60^\circ}{\sin 60^\circ} = -5.8 \text{ kN}$$

$$\Sigma M_B = P \times \ell_{BC} - T_1 \cdot \ell_{BC} \sin 60^\circ = 0$$

$$T_1 = \frac{P}{\sin 60^\circ} = \frac{10 \text{ kN}}{\sin 60^\circ} = 11.5 \text{ kN}$$

(3)

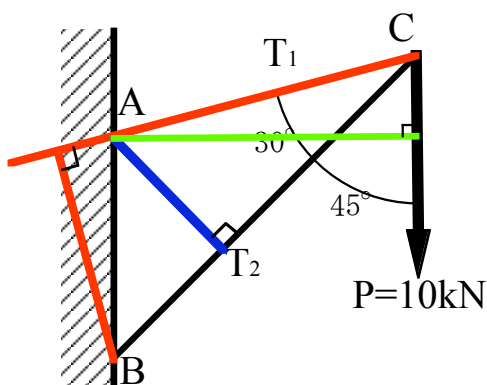

モーメントの釣り合いより

$$\Sigma M_A = P \times \ell_{AC} \cos 15^\circ + T_2 \cdot \ell_{AC} \sin 30^\circ = 0$$

$$T_2 = -\frac{P \cdot \cos 15^\circ}{\sin 30^\circ} = -\frac{10 \text{ kN} \cdot \cos 15^\circ}{\sin 30^\circ} = -19.3 \text{ kN}$$

$$\Sigma M_B = P \cdot \ell_{BC} \sin 45^\circ - T_1 \cdot \ell_{BC} \sin 30^\circ = 0$$

$$T_1 = \frac{P \cdot \sin 45^\circ}{\sin 30^\circ} = \frac{10 \text{ kN} \cdot \sin 45^\circ}{\sin 30^\circ} = 14.1 \text{ kN}$$